

# StarHazer II™

The new StarHazer II has DMX on-board, superior insulation for whisper quiet operation, cycle/direct/remote operation, double the output of the previous StarHazer, a Seven Filter System, and a Dual Opening for far and wide coverage. It also has a convenient 5-pin XLR "In" and "Send" feature for setting up other units on the same DMX line. Also included is the 25' remote control featuring buttons which allow either manual "on" and "off" operation, or "timed" operation of 0-60 seconds "on" or 0-4 minutes "off".



## Specifications

#100030 (230V P/N 100035)

**Type of Haze:** Odorless, even, transparent, long-lasting High Performance Fluid P/N 150660

**Weight:** 44 lb (19.95 kg)

**Size:** 24 1/2" x 12" x 12 1/2" (62.2 cm x 30.5 cm x 31.8 cm)

**Shipping Weight:** 52 lb (23.6 kg)

**Shipping Box Size:** 31" X 16" X 16" (78.74 cm x 40.6 cm x 40.6 cm)

**DMX:** DMX on board 5 pin XLR in/out

**Fluid:** CITC's High-Performance Fluid (oil-based) P/N 150660, gallons (3.8 liter), 5-gal. cubitainer (19 liter) & 55-gal. (208 liter) drum)

**Fluid Consumption:** 1/2 oz (15 ml) per hour or 1 qt (0.95 liter) per 32 hours

**Output:** 70,000 cubic feet/hour (21,336 meters/hour)

**Warm Up Time:** None, instant on—no warm-up

**Continuous Fog:** Can run continuously - best with cycle timer


**Duration:** 20 minutes of haze lasts 3 - 4 hours

**Electrical Supply:** 120 VAC, 60 Hz, 5a or 230 VAC, 50 Hz, 3a

**Fuse:** 120VAC: 8A – 250 V, 5x20 mm 230VAC: 5A – 250V, 5x20 mm

**Limited Warranty:** Five year limited warranty on tank and compressor, 90 days on electrical components

**Remote Control:** On/off, cycle timer 25' cord, 3 pin XLR in/out connectors, 0-60 s "On", 0-4 m "Off"

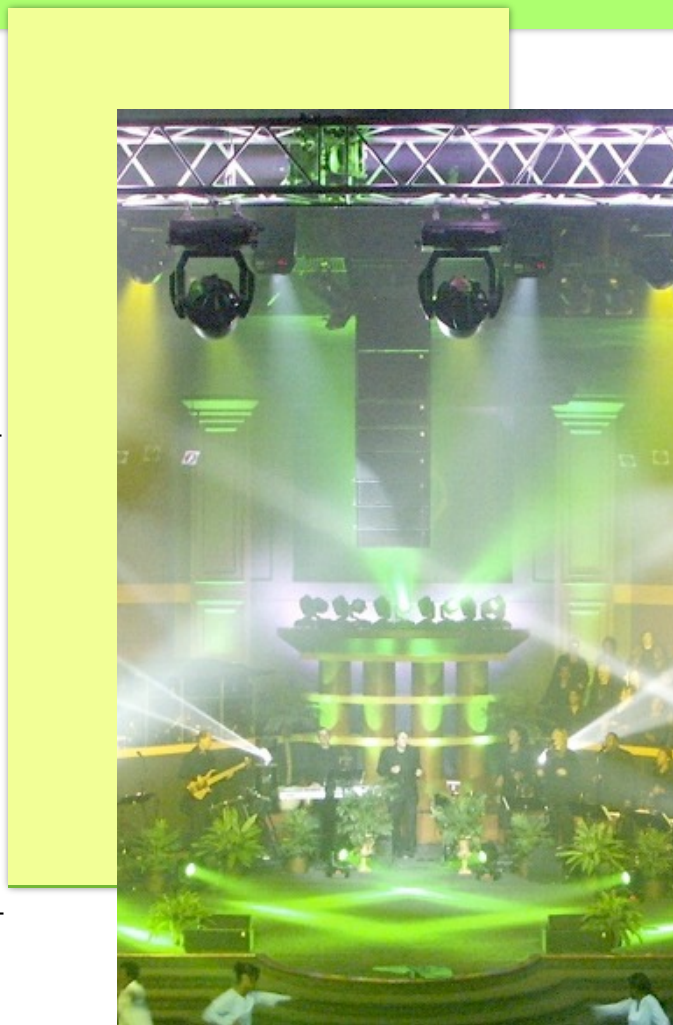

European Distributorship:

White Light Ltd. UK

Sales@WhiteLight.Ltd.uk

(888) 786-CITC (425) 776-4950 info@citcfx.com www.citcfx.com Everett, WA USA